
FIG. 1


.) . .

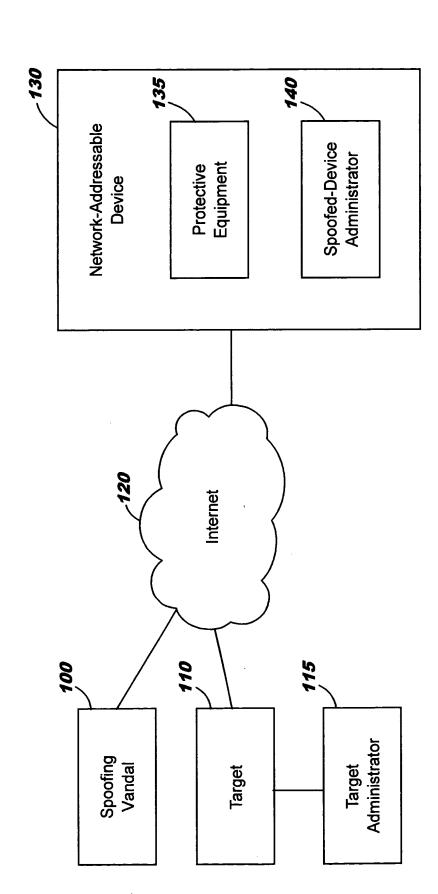

RSW920010082US1
Method for Enabling a Network-Addressable Device to Detect use of its Identity by a Spoofer Lingafeit, C. et al. 2/5

FIG. 2

u 9 1 .

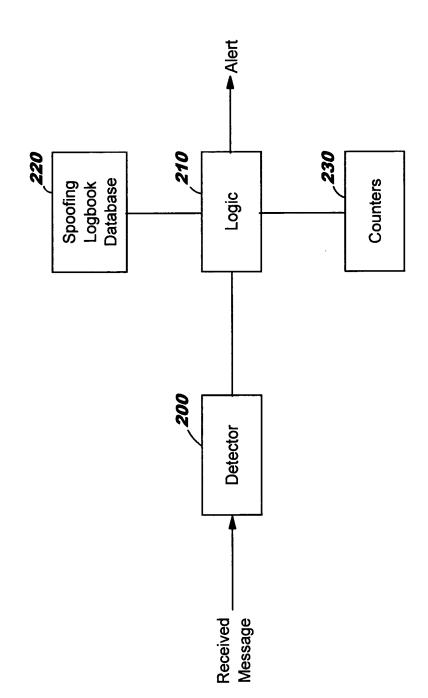

RSW920010082US1 Method for Enabling a Network-Addressable Device to Detect use of its Identity by a Spoofer Lingafelt, C. et al. 3/5

FIG. 3A

<u>220</u>

	320	330	340
	Source Addresses	Event Types	Event Times
310A —	ID1	1 or 2	Time 1
310B	ID2	1 or 2	Time 2
310C	ID3	1 or 2	Time 3
310N	IDN	1 or 2	Time N

RSW920010082US1 Method for Enabling a Network-Addressable Device to Detect use of its Identity by a Spoofer Lingafelt, C. et al. 4/5



FIG. 3B

<u>230</u>

230A	Count for First Unique ID	
230B —	Count for Second Unique ID	
	•	
230J —	Count for J-th Unique ID	
230M	Count for M-th Unique ID	





